


ARCHITECTURAL INSULATED METAL WALL PANEL

METL-SPAN INSULATED METAL PANELS



The Metl-Span **Architectural insulated metal wall panel** is ideal for high profile architectural applications. The panels are designed to be installed vertically or horizontally with concealed clips and fasteners in the side joint. Architectural wall panels provide a beautiful flush appearance. Available design features include custom widths and preformed and radius corners.

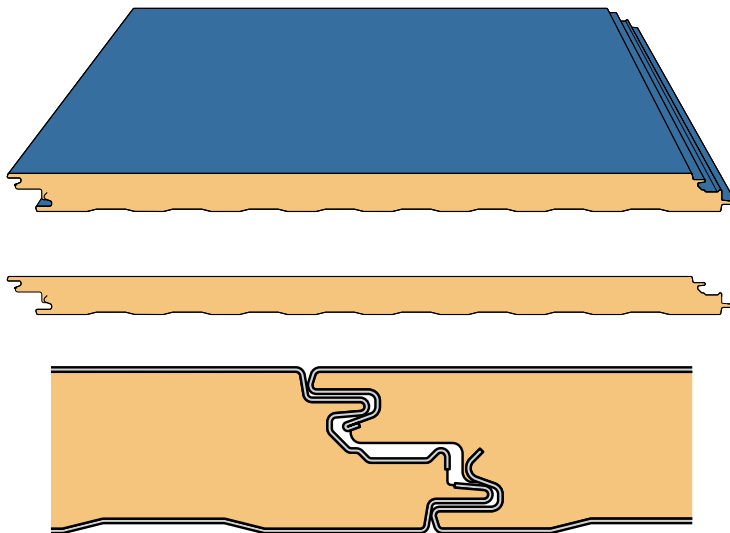

ARCHITECTURAL INSULATED METAL WALL PANEL FEATURES

Exterior Profile: Architectural flat with flush side joints for high profile projects.

Interior Profile: Light Mesa nominal $\frac{1}{16}$ " deep

Panel Core: Foamed-in-place, Non-CFC & zero ODP polyurethane, FM Class I approval

Thermal Values: K-factor, Btu in/ft² hr. °F @ 75°F (24°C) mean core temperature = 0.140. K-factor, Btu in/ft² hr. °F @ 40°F (4°C) mean core temperature = 0.126.

Module Widths: 24", 30", 36"

Panel Thickness: 2", 2 $\frac{1}{2}$ ", 3" and 4"

Panel Lengths: Standard 8'-0" to 32'-0"

Exterior Facings: Stucco embossed, G-90 galvanized and/or AZ-50 aluminum-zinc coated steel in 22 Ga.

Interior Facings: Stucco embossed, G-90 galvanized and/or AZ-50 aluminum-zinc coated steel in 26 Ga., 24 Ga. and 22 Ga.

Panel Joint: Offset double tongue and groove with extended metal shelf for positive face fastening

Fastening: Fastener and Clip concealed in the side joint

FM Approved Class I with no height restrictions.

FINISHES & COLORS

A full range of exterior colors & coatings are available for the architectural market. For specific information about our available colors and coatings, visit us online for a comprehensive selection.

METL-SPAN: Pioneering Insulated Metal Panel Technology

1720 Lakepointe Drive, Suite #101, Lewisville, Texas 75057 • 877.585.9969 • FAX: 972.420.9382

metlspan.com • Visit our website or call us today for a free architectural catalog and CAD CD-ROM.

© 2010 Metl-Span LLC - A BlueScope Steel Company. All rights reserved. Printed in the U.S.A. METL-11-004-1 C&I